


Tekniska data

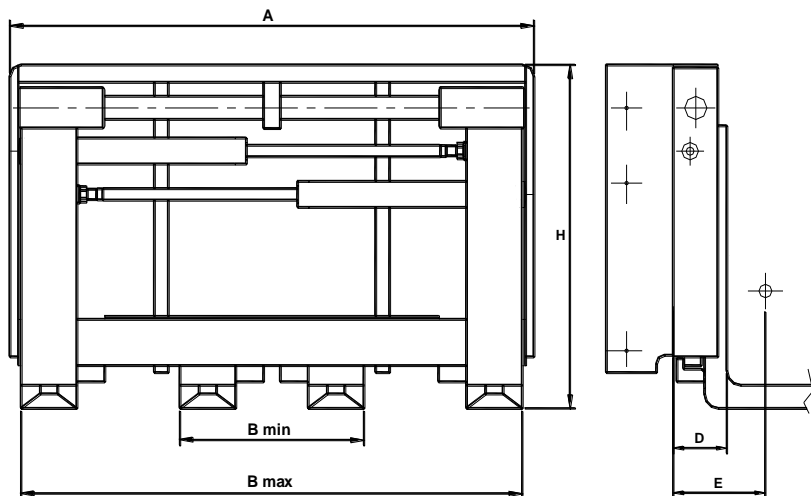

Model Type	Cap./LC kg/mm	Fork dim. WxTxLmm	Width A mm	Opening range B min-max mm	E mm	Class FEM	Height H mm	D mm	Weight kg	Lost load
EM2-16/880	1600/500	100x35x1200	880	330-820	189	2A / 2B	590 / 666	91	192	40 56 96
EM2-16/1000			1000	330-940	183				199	
EM2-16/1050			1050	330-990	180				201	
EM2-16/1100			1100	330-1040	177				203	
EM2-16/1150			1150	330-1090	174				205	
EM2-16/1200			1200	330-1140	171				207	
EM2-20/880	2000/500	100x40x1200	880	330-820	225	2A / 2B	595 / 671	96	202	40 56 96
EM2-20/1000			1000	330-940	219				210	
EM2-20/1050			1050	330-990	217				213	
EM2-20/1100			1100	330-1040	215				216	
EM2-20/1150			1150	330-1090	213				219	
EM2-20/1200			1200	330-1140	211				222	
EM2-25/1000	2500/500	100x40x1200	1000	330-940	174	2A / 2B	605 / 681	96	232	40 56 96
EM2-25/1050			1050	330-990	172				236	
EM2-25/1100			1100	330-1040	170				240	
EM2-25/1150			1150	330-1090	168				244	
EM2-25/1200			1200	330-1140	166				248	

Model Type	Cap./LC kg/mm	Fork dim. WxTxLmm	Width A mm	Opening range B min-max mm	E mm	Class FEM	Height H mm	D mm	Weight kg			
EM3-30/1000	3000/500	120x40x1200	1000	370-930	224	3A / 3B	640 / 767	117	290	50	67	117
EM3-30/1050			1050	370-980	222				295			
EM3-30/1100			1100	370-1030	220				300			
EM3-30/1150			1150	370-1080	218				305			
EM3-30/1200			1200	370-1130	216				310			
EM3-30/1250			1250	370-1180	214				315			
EM3-30/1300			1300	370-1230	212				320			
EM3-35/1000	3500/500	125x45x1200	1000	380-930	204	3A / 3B	640 / 767	122	315	50	72	122
EM3-35/1050			1050	380-980	202				320			
EM3-35/1100			1100	380-1030	200				325			
EM3-35/1150			1150	380-1080	198				330			
EM3-35/1200			1200	380-1130	196				335			
EM3-35/1250			1250	380-1180	194				340			
EM3-35/1300			1300	380-1230	192				345			
EM3-40/1200	4000/500	125x45x1200	1200	380-1130	184	3A / 3B	650 / 777	127	345	50	72	122
EM3-40/1300			1300	380-1230	182				355			
EM3-40/1400			1400	380-1330	180				365			
EM3-40/1500			1500	380-1430	178				375			
EM3-40/1600			1600	380-1530	176				385			

Model Type	Cap./LC kg/mm	Fork dim. WxTxLmm	A mm	Opening range B min-max mm	E mm	Class FEM	H mm	D mm	Weight kg			
EM4-50/1300	5000/600	125x50x1200	1300	450-1200	170	4A / 4B	849 976	125	500	74	50	124
EM4-50/1400			1400	450-1300	165				520			
EM4-50/1500			1500	450-1400	160				540			
EM4-50/1600			1600	450-1500	155				560			
EM4-50/1700			1700	450-1600	150				580			
EM4-50/1800			1800	450-1700	145				600			
EM4-60/1300	6000/600	130x60x1200	1300	450-1200	170	4A / 4B	849 /976	135	530	74	60	134
EM4-60/1400			1400	450-1300	165				550			
EM4-60/1500			1500	450-1400	160				570			
EM4-60/1600			1600	450-1500	155				590			
EM4-60/1700			1700	450-1600	150				610			
EM4-60/1800			1800	450-1700	145				630			

Model Type	Cap./LC kg/mm	Fork dim. WxTxLmm	A mm	Opening range B min-max mm	E mm	Class FEM	H mm	D mm	Weight kg
EM4-70/1800	7000/600	150x60x1200	1800	450-1640	175	4A / 4B	990/1117	155	950
EM4-70/1900			1900	450-1740	170				975
EM4-70/2000			2000	450-1840	165				1000
EM4-70/2100			2100	450-1940	160				1025
EM4-70/2200			2200	450-2040	155				1050
EM4-70/2300			2300	450-2140	150				1075
EM4-70/2300			2400	450-2240	145				1100
EM4-80/1800			8000/600	150x65x1200	1800				450-1640
EM4-80/1900	1900	450-1740			175	990			
EM4-80/2000	2000	450-1840			170	1015			
EM4-80/2100	2100	450-1940			165	1040			
EM4-80/2200	2200	450-2040			160	1065			
EM4-80/2300	2300	450-2140			155	1090			
EM4-80/2300	2400	450-2240			150	1115			
EM4-80/2400									

95 65 160

95 70 165